



PROTERRACE DRAIN FDP

VARNISHED/COATED ALUMINIUM

PFDP 10AL...
scale 1:2

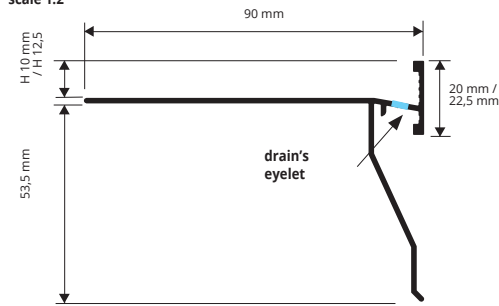

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

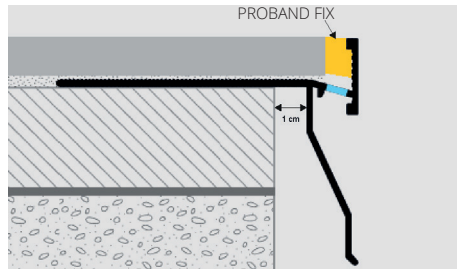


1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with PROBAND FIX (PRBFX).

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDP 10ALGF (seaside) = **PFDP 10ALGFS**
price for seaside treatment +50% on the gross price.

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

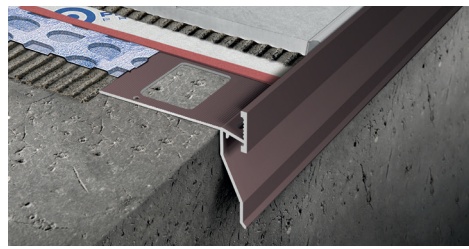

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFDP 10AL...	10		
PFDP 125AL...	12,5		

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand)
The code of the selected colour must be added to the article code.
E.g.: PFDP 10AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
-------------------	------------------	------------------------------	------------------------

COLOURS ON DEMAND

EMBOSSED	
EF - Beige (1019)	C - Corten

SEMIGLOSSY			
B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)



EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPFDP 10AL.../10		
AEPFDP 125AL.../10		


INTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AIPFDP 10AL.../10		
AIPFDP 125AL.../10		

JOINTS - pack. 1 Pc upper + 1 Pc lower

Article	H mm	€/Pack.
GINFDP ...AL .../1	10/125	


Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINFDP 10ALA/10



AEPFDP 10/125AL...



GINFDP 10/125AL .../1




AIPFDP 10/125AL...


PROSIDE WALK

VARNISHED/COATED ALUMINIUM

PSDWK 10AL / 125AL / 15AL / 20AL

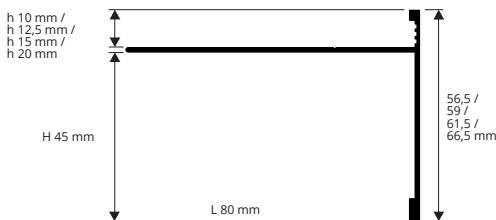

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

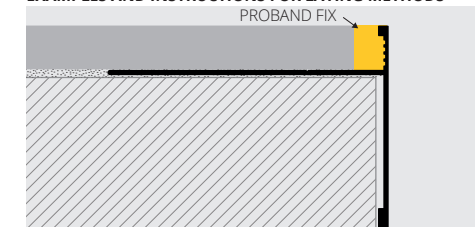

1. Choose PROSIDE WALK according to the tile thickness and desired colour.
 2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed.
 3. Fix the external corners with nails.
 4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element.
 5. Lay the tiles, leaving about 5 mm between tiles and profile.
 6. Seal the space between tiles and profile with PROBAND FIX (PRBFX).
- PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PSDWK 10ALGF (seaside) = **PSDWK 10ALGFS**
price for seaside treatment +50% on the gross price.

PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.



VARNISHED EMBOSSED ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80		
PSDWK 125AL...	12,5	45	80		
PSDWK 15AL...	15	45	80		
PSDWK 20AL...	20	45	80		

EMBOSSED COLOURS

A - Anthracite grey (no RAL)	GF - Gray (7038)	TF - Dark brown (8019)
------------------------------	------------------	------------------------

EMBOSSED COLOURS ON DEMAND

BF - White (9010)	C - Corten	EF - Beige (1019)
-------------------	------------	-------------------

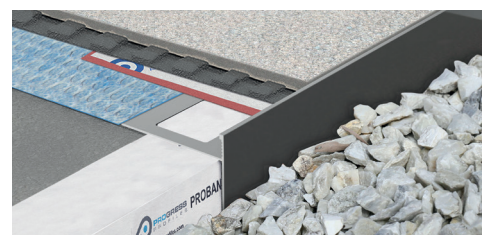

EXTERNAL CORNERS - pack. 10 Pcs


Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL.../10	10	45	80		
AEPSDWK 125AL.../10	12,5	45	80		
AEPSDWK 15AL.../10	15	45	80		
AEPSDWK 20AL.../10	20	45	80		

JOINTS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack.
GINSDWK ...AL.../10	10/125/15/20		

Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINSWK 10ALA/10

AEPSDWK external corner (welded)



GINSDWK joint

